



The Proven Performer in Laundry




SPEED QUEEN® QUANTUM® TOUCH

Washer-Extractors

• Quantum® Touch Control

Reimagine your laundry experience with the Speed Queen Quantum Touch display. Clear, easy to use, easy to understand directions with profitable cycle modifiers enhance your customers' experience and increase return on investment.

- 7", full color, touch screen display
- User-friendly screen with operating instructions built in as part of the control
- 11 basic cycles, 1 custom cycle, 15°C - 90°C temperature selections

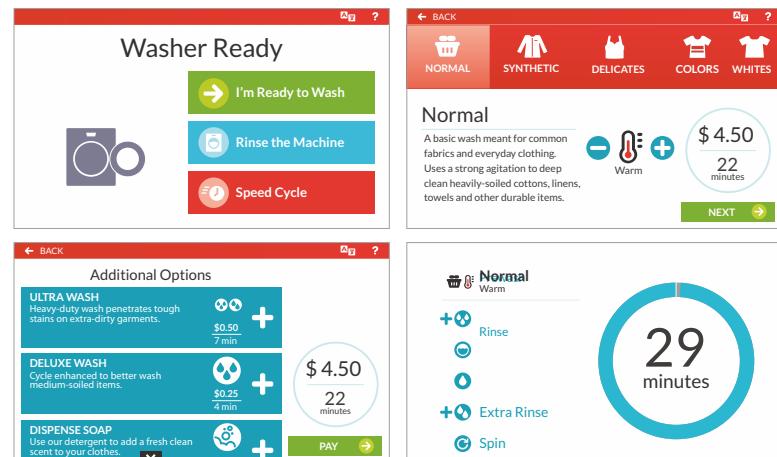

- Easy-to-understand cycle modifier prompts will encourage your customers to customize their wash
- Flexible pricing & additional revenue opportunities with customizable cycle modifiers, time-of-day pricing and lucky cycle options
- 30+ languages available
- On screen timer so your customers know exactly how much time their cycle will take
- Speed Cycle option for those who want to get in and out quickly
- Flexible Payment Options - Coin, Card, Mobile, Cash

Hardmount Washer-Extractors

heavy-duty design meets superior machine mechanics to form the industry's most trusted hardmount washer-extractor. Strong frame lasts longer, balances loads more efficiently, and is designed to reduce sound and vibration levels. Advanced inverter drive system provides smooth, reliable performance. Higher extraction speeds mean shorter dry times and lower energy bills. Sump system design maximizes cleaning power while using 7% less water. Leak detection with our patented Water Guardian, saves water by detecting slow or leaking fill-valves and drains. Easily serviceable with front panel access.



www.knblaundrysolutions.com

Hardmount Washer-Extractors

	SC020	SC030	SC040	SC060	SC080	SC100		
Control Option	Quantum Touch	Quantum Touch	Quantum Touch	Quantum Touch	Quantum Touch	Quantum Touch		
Capacity - lb (kg)	20 (9)	30 (13.6)	40 (18)	60 (27)	80 (36)	100 (45)		
Overall Width - in (mm)	26 (660)	29 (737)	30.6 (777)	34.1 (866)	41.5 (1054)	41.5 (1054)		
*Overall Depth - in (mm)	30.9 (785)	35.3 (897)	42.3 (1074)	44.7 (1135)	47.1 (1196)	51.1 (1298)		
Overall Height - in (mm)	43 (1092)	45 (1143)	47.2 (1199)	49.9 (1267)	57.2 (1453)	57.2 (1453)		
Cylinder Diameter - in (mm)	21 (533)	24 (610)	26.3 (668)	30 (762)	36 (914)	36 (914)		
Cylinder Depth - in (mm)	13.8 (351)	16 (406)	20.3 (516)	22 (559)	21.9 (556)	25.9 (658)		
Cylinder Volume - cu. ft (liters)	2.8 (79)	4.2 (119)	6.3 (178)	9.0 (255)	12.9 (365)	15.2 (430)		
Door Opening Size - in (mm)	11.6 (295)	14.3 (363)	16.3 (414)	16.3 (414)	18.5 (470)	18.5 (470)		
Door Bottom to Floor - in (mm)	14.4 (366)	14 (356)	14.6 (371)	14.9 (378)	17.9 (455)	17.9 (455)		
Water Inlet Connection - in (mm)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)		
Drain Diameter - in (mm)	1 x 3 (76)	1 x 3 (76)	1 x 3 (76)	1 x 3 (76)	1 x 3 (76)	1 x 3 (76)		
Drain Height to Floor - in (mm)	3.9 (99)	4.3 (109)	4.5 (114)	4.9 (124)	5.1 (130)	5.1 (130)		
Motor Power Consumption -(HP) kW	1 (0.75)	1 (0.75)	2 (1.5)	3 (2.2)	5 (3.7)	5 (3.7)		
Total # of Speeds	9	9	9	9	9	9		
Cylinder Speeds - RPM (G-Force)	Gentle Wash Distribution Very Low Low Medium High Very High Ultra High	37 (0.4) 51 (0.8) 92 (2.5) 301 (27) 518 (80) 579 (100) 648 (125) 710 (150) 819 (200)	34 (0.4) 48 (0.8) 86 (2.5) 282 (27) 485 (80) 542 (100) 606 (125) 664 (150) 766 (200)	33 (0.4) 46 (0.8) 82 (2.5) 269 (27) 464 (80) 518 (100) 579 (125) 635 (150) 733 (200)	31 (0.4) 43 (0.8) 77 (2.5) 252 (27) 434 (80) 485 (100) 542 (125) 594 (150) 686 (200)	28 (0.4) 39 (0.8) 70 (2.5) 230 (27) 396 (80) 443 (100) 495 (125) 542 (150) 626 (200)	28 (0.4) 39 (0.8) 70 (2.5) 230 (27) 396 (80) 443 (100) 495 (125) 542 (150) 568 (165)	
*** Voltage/Circuit Breaker - FLA	B X Y N	120/60/1 200-240/50-60/1/3 220-240/60/1/3 (Pump Drain Only) 440-480/50-60/3	15-9 15-4 (1 Ph) 15-3 (3 Ph) 15-4 (1 Ph) 15-4 (3 Ph) 15-2	15-12 15-7 (1 Ph) 15-4 (3 Ph) 15-7 (1 Ph) 15-4 (3 Ph) 15-3	20-15 15-7 (1 Ph) 15-4 (3 Ph) 15-7 (1 Ph) 15-4 (3 Ph) 15-3	□ 15-11 (1 Ph) 15-7 (3 Ph) □ □ 15-4	□ 20-15 (1 Ph) 15-9 (3 Ph) □ □ 15-6	□ 20-16 (1 Ph) 15-10 (3 Ph) □ □ 15-6
Shipping Dimensions Approx.- in (mm)		Width Depth Height	28 (711) 33.8 (859) 49.4 (1255)	31.5 (800) 38.3 (973) 51.3 (1303)	32.5 (826) 43.5 (1105) 53.0 (1361)	37.5 (953) 46.9 (1191) 56.3 (1430)	44 (1118) 54.5 (1384) 59.6 (1514)	44 (1118) 58.5 (1486) 59.6 (1514)
Packed (with crate) Dimensions Approx.- in (mm)		Width Depth Height	32.5 (826) 36.8 (935) 55.0 (1397)	36.0 (915) 41.3 (1050) 55.0 (1397)	37.0 (940) 45.9 (1166) 55.6 (1413)	42.0 (1069) 49.9 (1268) 64.0 (1626)	48.5 (1232) 57.5 (1461) 65.1 (1654)	48.5 (1232) 61.5 (1563) 65.1 (1654)
Net Weight - lb (kg)			340 (154)	440 (200)	540 (245)	680 (308)	1250 (567)	1280 (581)
Shipping Weight - lb (kg)			380 (172)	480 (218)	580 (263)	720 (327)	1300 (590)	1330 (603)
Slat Crate Shipping Weight - lb (kg)			460 (209)	580 (263)	680 (308)	840 (381)	1430 (649)	1460 (662)
****Agency Approvals			UL _{us}	UL _{us}				

