



The Proven Performer in Laundry




SPEED QUEEN® QUANTUM® TOUCH

Softmount Washer-Extractors

Quantum® Touch Control

Reimagine your laundry experience with the Speed Queen Quantum Touch display. Clear, easy to use, easy to understand directions with profitable cycle modifiers enhance your customers' experience and increase return on investment.

- 7", full color, touch screen display
- User-friendly screen with operating instructions built in as part of the control
- 11 basic cycles, 1 custom cycle, 3 temperature selections between 15°C and 90°C.

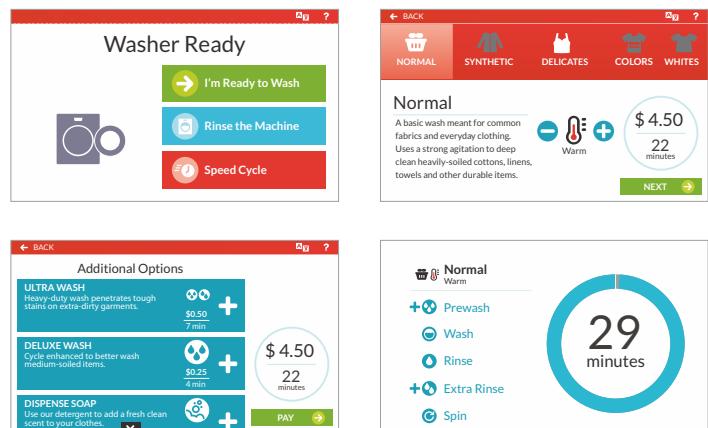

A heavy-duty design meets superior machine mechanics to form the Industry's most trusted softmount washer-extractor.

- Contemporary aesthetic for a more premium retail experience
- Strong frame lasts longer, balances loads more efficiently, and is designed to reduce sound and vibration levels
- Advanced inverter drive system provides smooth, reliable performance
- High extraction speeds mean shorter dry times and lower energy bills
- Easily serviceable with front panel access



www.knblaundrysolutions.com

SPEED QUEEN® QUANTUM® TOUCH

Softmount Washer-Extractors



	SY180	SY280
Control Option	Quantum Touch	Quantum Touch
Capacity - lb (kg)	40 (18)	70 (28)
Overall Width - in (mm)	38.18 (970)	38.18 (970)
Overall Depth - in (mm)	37.80 (960)	46.26 (1175)
Overall Height - in (mm)	56.30 (1430)	56.30 (1430)
Cylinder Diameter - in (mm)	29.53 (750)	29.53 (750)
Cylinder Depth-in (mm)	16.14 (410)	24.41 (620)
Cylinder Volume - cu. ft (liters)	6.4 (180)	9.9 (280)
Door Opening Size - mm	460	460
Door Bottom to Floor - in (mm)	18.77 (477)	18.77 (477)
Heating - Electricity (standard) -kW	12/18	21.9
Heating - Steam (bar)	1-8	1-8
Hot water (°C)	90	90
Sound pressure level - dB(A)	<65	<65
Water valves connection (BSP)	3/4"	3/4"
Water pressure (kPa)	100-800	100-800
Rec. water pressure (kPa)	300-500	300-500
Water Inlet Connection - 1/mm	20	20
Drain Diameter - in (mm)	3 (76)	3 (76)
Drain Height to Floor - in (mm)	4.27 (108.5)	4.27 (108.5)
Steam valve connection (BSP)	1/2"	1/2"
Steam pressure (kPa)	100-800	100-800
Motor Power Consumption - HP (kW)	2.95 (2.20)	4.02 (3.0)
Wash speed - RPM	42	42
Extraction - RPM	980	915
G-factor	400	350
Shipping Dimensions	Width	40.35 (1025)
Approx.- in (mm)	Depth	39.96 (1015)
	Height	61.81 (1570)
Net Weight - lb (kg)	838 (380)	1092 (495)
Shipping Weight-lb (kg)	871 (395)	1135 (515)
Agency Approvals	CE, EAC, WRAS, Watermark, ROHS	CE, EAC, WRAS, Watermark, ROHS

Authorised Sales, Service & Spare Parts Distributor across India

K&B Associates

Office No. 56, Amrut Ganga Society, Manik Baug, Sinhagad Road, Pune - 411 051



+91 8983881234 | 9405014649



info@knblaundrysolutions.com



www.knblaundrysolutions.com